



**COMBINED TEMPERATURE
CONTROLLER
AND LIMITER WITH POSITIVE
SAFETY 1+2 POLES VTLS-01**

COMBINED TEMPERATURE CONTROLLER AND LIMITER WITH POSITIVE SAFETY 1+2 POLES VTLS-01



These safety devices automatically switch off the current in the controlled circuit as the temperature is reached, and switch it on again as the temperature falls below the set threshold value. The temperature of the controlled medium is thus maintained within a narrow zone. At the control failure, these devices automatically switch off the current in the controlled circuit as the pre-set temperature limit is reached, thus preventing overheating. Once the deflection of the temperature regulation was repaired, in voltage-free state, the limiter/protective guard can be re-started manually. Working temperature range: 0 – 150 °C

Areas of application:

- household heating boilers
- hot-water boilers and hot-water storage tanks


Trouble-free operation is conditioned by proper heat transfer between the controlled medium and the controller's and limiter's sensors.

TECHNICAL DATA

Lifetime:	R, W: 50.000 cycles B, SB 1000 cycles	Mode of operation	R, W: 2C; B SB: 2BG/2AG/2AGM
Switching power:	20(4)A-4(1)A/250 V~; 16(4)A-4(1)A/400 V~;	Sensor:	Tubular: Cu: Ø5; Ø6; Ø8 INOX: Ø3; Ø4; Ø6
Max. temp. for the main unit:	85 °C / 150 °C	Protection class:	Class I. / IP 00
Work environment:	Normal	Heat and fire resistance:	D
Leakage current resistance:	≥ 175	Working range:	0-150°C
Max. sensor temperature:	Upper switching value +15%	Surface protection:	Galvanized
Length of the shaft:	14-50mm	Electrical connections:	A 6,3x0,8 tab contact

TYPE-EXAMPLES

Type Code	Type mark	Switch -off temp. °C	ΔT	Sensor ØD x L1/mm/;	Capillary Ød x L2 /mm/	Protection tube L3 /mm/	Length of the shaft Lt /mm/
VT-5272-0-520-0		10-85 100°C (0/-8)	4 ± 2	6,5 x 73 Cu	1,4 x 650	480	16

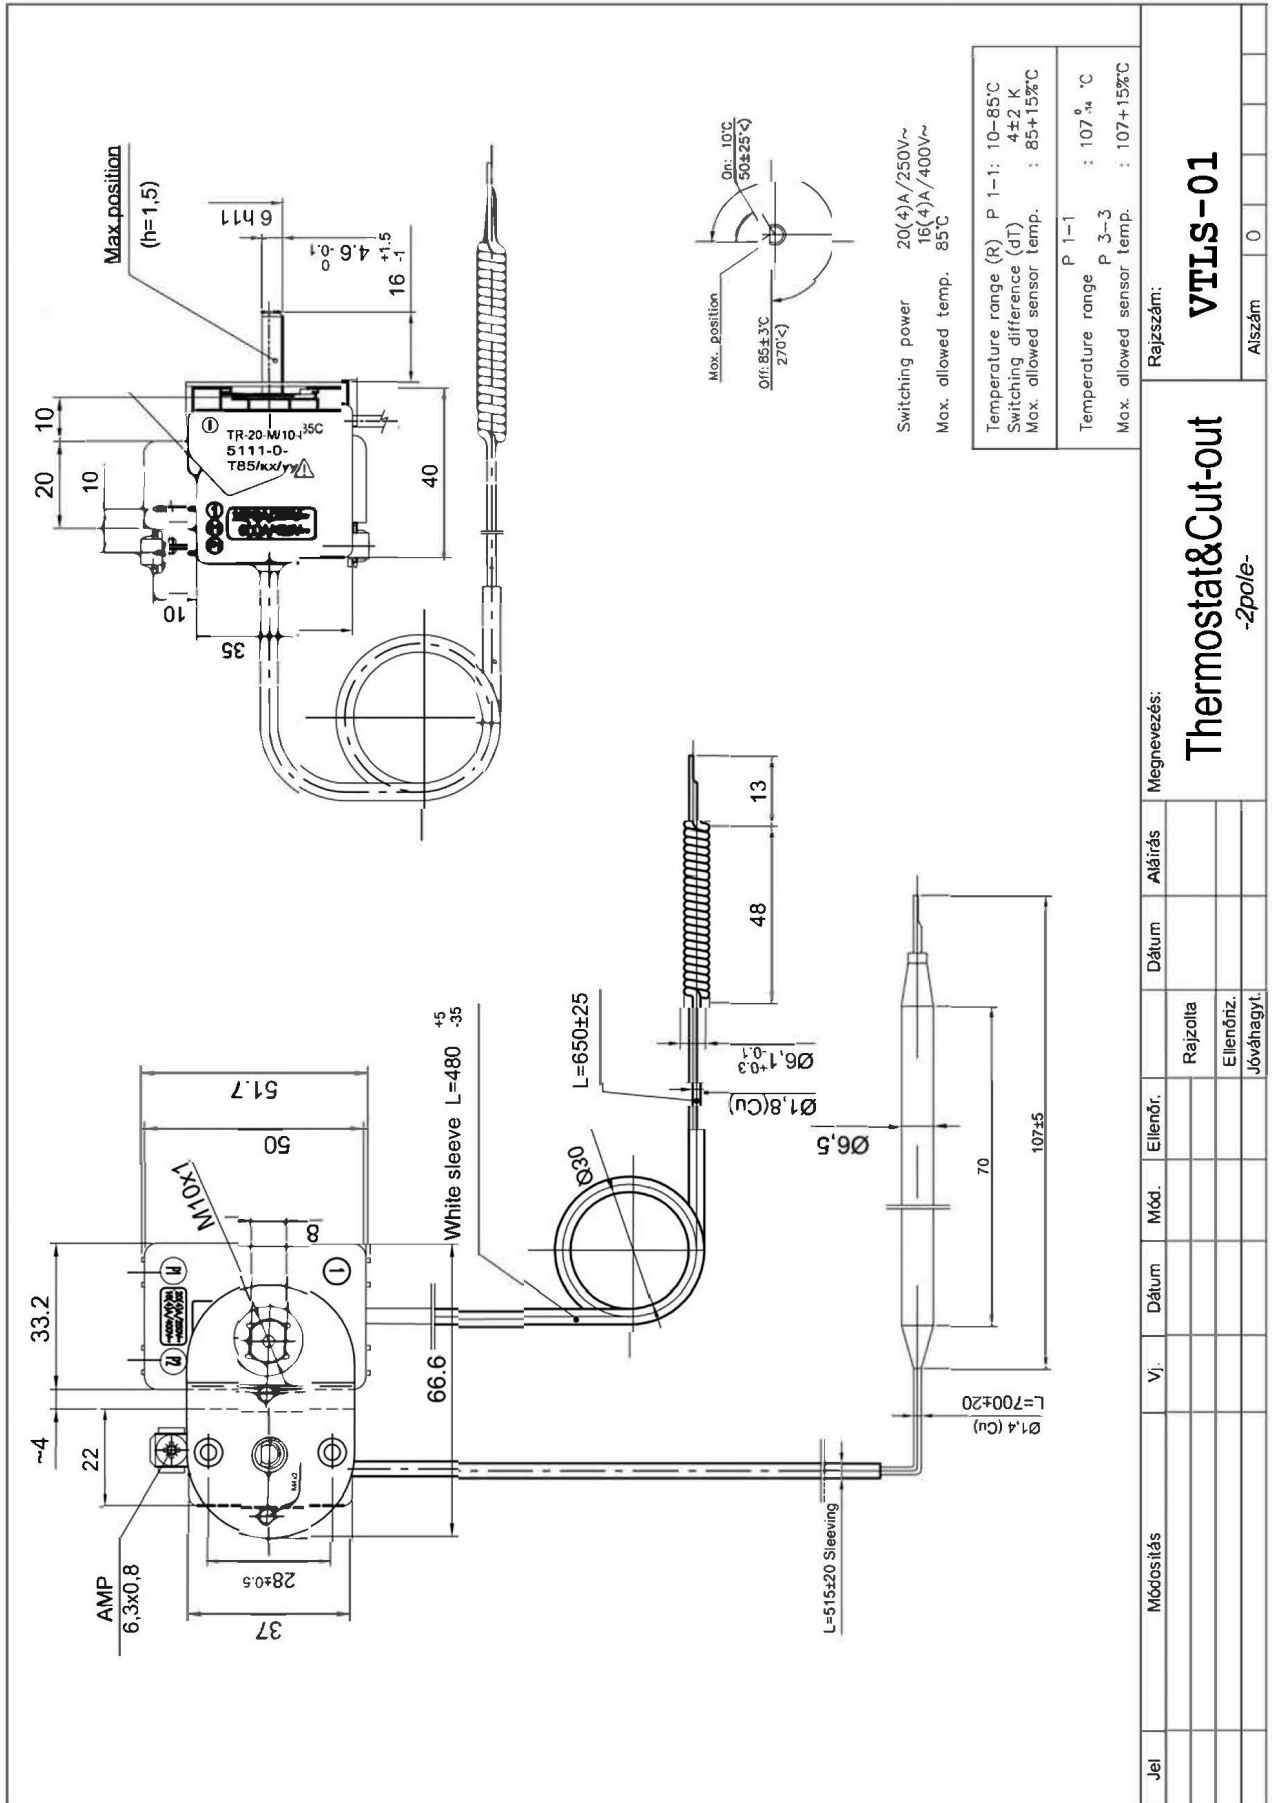

Switching power 20(4)A/250V~
16(4)A/400V~
Max. allowed temp. 85°C

Temperature range (R) P 1-1: 10-85°C
Switching difference (dT) 4±2 K
Max. allowed sensor temp. : 85±15%°C

Temperature range P 1-1 : 107^{±4} °C
P 3-3 : 107±15%°C
Max. allowed sensor temp. : 107±15%°C

Jel	Módosítás	V.i.	Dátum	Mód.	Ellenőr.	Rajzolta	Dátum	Alkírás	Megnevezés:
									Thermostat&Cut-out
									-2pole-
									Rajzszám: VTLS-01
									Alszám 0



Contact Us



www.vsol-controls.com

info@vsol-controls.com

Made in Hungary